


Symbol



Features

- * Compact size with effective air service.
- * Oil spray in mist ensures good lubrication for machines.




How to order

L200A	—	02	N	B	A	K
Miniature lubricator		Port size	Thread	Mounting bracket	Bowl	Bowl guard
		01 1/8"	Blank G	Blank W/O bracket	Blank Standard bowl	Blank W/O guard
		02 1/4"	N NPT	B W/I bracket	A Anti-acid & alkali bowl	K W/I guard
			R Rc			

Specifications


Model	L200A-01	L200A-02
Port size	1/8"	1/4"
Fluid	Compressed air	
Body material	Polycarbonate	
Bowl material	Polycarbonate (Standard)	
Operating pressure range	0.5 ~ 10 kgf/cm ²	
Proof pressure	12 kgf/cm ²	
Max. flow rate l/min (ANR)	2449	
Ambient temperature	-10℃ ~ 60℃	
Lubricator oil (Recommended)	ISO-VG32	
Lubricator bowl capacity	50cc	
Net weight	165g	

Flow chart

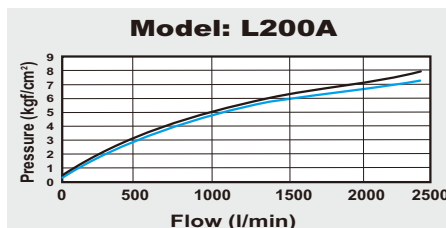

Dimensions

L200A-01, 02

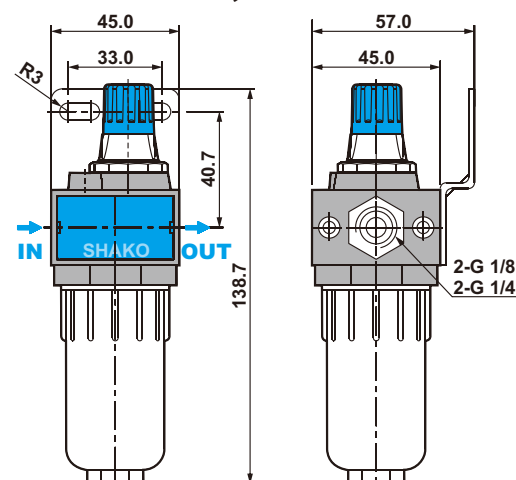

Note:

X axis: Flow (l/min)
Y axis: Pressure (kgf/cm²)
Blue line (P0) = Outlet pressure
Black line (P1) = Inlet pressure
P1-P0=Pressure range

